


564 Oct-O-Mat™

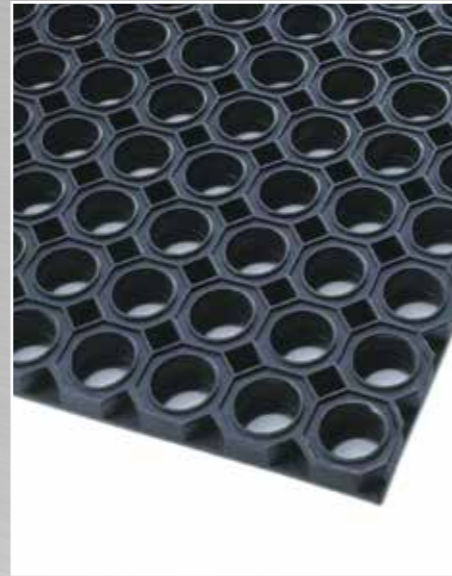

- This durable rubber product is designed to function at the immediate entrance, primarily as a scraper mat to stop dirt, grit and grime outside the doorway.
- Its superior rubber compounds is made to withstand weather extremes and the heaviest of foot traffic
- Raised knobs underneath allow excellent drainage, leaving a clean and dry surface.
- Outdoor entrances - Heavy foot traffic areas
- Custom sizes available.
- Hose off with water and hang to dry.
- The heavy weight of this mat assures it is non-shifting.

564 Oct-O-Mat™

PRODUCT SPECIFICATIONS		
Designation	Dust Control Matting	
Type	Non-absorbent/ scrape rubber mat	
Description	Octogonal ring design with open construction	
Material	Natural rubber compound	
Process	Compression moulding	
Category	Outdoor Non absorbent - Rubber classics	
Recommended use	Outdoor - heavy foot traffic	
Colours	Black	
Weight	12,7 kg/m ²	
Thickness	23 mm	
Standard sizes	60 cm x 80 cm 75 cm x 100 cm 80 cm x 120 cm 100 cm x 150 cm	
Custom sizes	Per m ²	
Special remarks	Suitable for use under extreme weather conditions Accessories: Connectors, Insert brushes	
PRODUCT TESTING		
Tests	Norms	Results
Abrasion resistance	ASTM D3884	
Colour fastness to light	AATCC 16E	
Accelerated wear test by sim floor machine	U.S.	
Accelerated soiling	U.S.	
Anti-slip	DIN51130 BGR181	
Water retention	U.S	
Hardness	U.S	60 Shore A
Sanitary epidemiologic test	GN 2.1.6.1338-03 MCL GN 2.1.6.2309-07 OBUV	Pass - Certificate no. 77.01.16.251.P.044985.07.09
FIRE TESTING		
Surface Flammability	ASTM D2859	
	Classification of the reaction to fire performance	DIN EN 13501-1 B1 on demand
Sustainability	<ul style="list-style-type: none"> • Recyclable material • REACH compliant (Registration, Evaluation, Authorization and restrictions of Chemicals) • Contributes to cleaner environment by reducing need of cleaning chemicals 	